




Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

05.05.03

Rec'd PCT/IB 14 DEC 2004
PCT/IB 03 / 02479

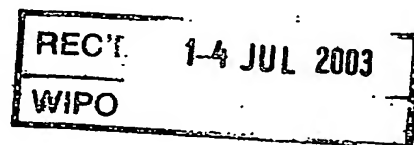

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02077375.0

BEST AVAILABLE COPY

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)



Anmeldung Nr:
Application no.: 02077375.0
Demande no:

Anmeldetag:
Date of filing: 17.06.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Dynamic copy window control for domain expansion reading

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G11B11/105

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE TR

Dynamic copy window control for domain expansion reading

The present invention relates to a method and apparatus for reading a domain expansion recording medium, such as a MAMMOS (Magnetic AMplifying Magneto-Optical System) disk, comprising a recording or storage layer and an expansion or readout layer.

5 In magneto-optical storage systems the minimum width of the recorded marks is determined by the diffraction limit, that is by the Numerical Aperture (NA) of the focussing lens and the laser wavelength. A reduction of the width is generally based on applying shorter wavelength lasers and higher NA focussing optics. During magneto-optical recording the minimum bit length can be reduced to below the optical diffraction limit by
10 using Laser Pulsed Magnetic Field Modulation (LP-MFM). In LP-MFM the bit transitions are determined by the switching of the field and the temperature gradient induced by the switching of the laser.

Fig. 3 shows a typical pattern of crescent shaped bits or recorded domains as formed in the recording layer by an LP-MFM recording with a width of $0.6\mu\text{m}$ and a
15 thickness of $0.2\mu\text{m}$. For readout of the small crescent shaped marks recorded in this way Magnetic Super Resolution (MSR) or Domain Expansion (DomEx) methods have been proposed. These technologies are based on recording media with several magneto-static or exchange-coupled layers.

Fig. 2 shows a typical stack of a recording or storage layer rcl and of a
20 readout layer rdl for such MSR media. In Fig. 2, an arrow dmd indicates the disk moving direction. The readout layer rdl on a magneto-optical disk is arranged to mask adjacent bits during reading, while, according to domain expansion, a domain d in the center of a spot m is expanded. The advantage of the domain expansion technique over MSR results in that bits with a length below the diffraction limit can be detected with a similar signal-to-noise ratio
25 (SNR) as bits with a size comparable to the diffraction limited spot size. MAMMOS is a domain expansion method based on magneto-statically coupled storage and readout layers wherein a magnetic field modulation is used for expansion and collapse of the expanded domains d in the readout layer rdl.

In the above mentioned domain expansion techniques, like MAMMOS, a written mark from the storage layer rcl is copied to the readout layer rdl upon laser heating and with the help of an external magnetic field. Due to the low coercivity of this readout layer the copied mark will expand to fill the optical spot and can be detected with a saturated signal level which is independent of the mark size. Reversal of the external magnetic field collapses the expanded domain. On the other hand, a space in the storage layer will not be copied and no expansion will occur. Therefore, no signal will be detected in this case.

To read out the bits or domains in the storage layer rcl, the thermal profile of the optical spot is used. When the temperature of the readout layer rdl is above a predetermined threshold value the magnetic domains are copied from the storage layer rcl to the magneto-statically coupled readout layer rdl. This because the stray field H_S from the storage layer rcl, which is proportional to the magnetization of this layer, increases as a function of the temperature.

Fig. 4 shows a diagram indicating a characteristic of the magnetization M_S of the storage or recording layer as a function of the temperature. According to Fig. 4 the magnetization M_S increases as a function of the temperature for the temperature region just above a compensation temperature T_{comp} . This effect results from the use of an rare earth-transition metal (RE-TM) alloy which generates two counteracting magnetizations M_{RE} (rare earth component) and M_{TM} (transition metal component) with opposite directions.

Fig. 5 shows a diagram indicating the effect of the coercivity of the readout layer rdl as a function of the temperature. The coercivity of the readout layer rdl decreases as function of the temperature in this region just above the compensation temperature T_{comp} . As an example two layers with different compensation temperature are shown in Fig. 5.

By applying an external magnetic field the copied domain in the readout layer rdl expands to a saturated detection signal independent of the size of the original domain. This copying process is non-linear. When the temperature is above the threshold value magnetic domains are coupled from the storage layer rcl to the readout layer rdl. For temperatures above this threshold temperature the following condition is satisfied:

$$H_S + H_{ext} \geq H_c \quad (1)$$

where H_S is the stray field of the storage layer rcl at the readout layer rdl, H_{ext} is the external applied field and H_c is the coercive field of the readout layer rdl. The spatial region where this copying occurs is called the 'copy window' w . The size of this copy window w is very critical for accurate readout. When the condition (1) is not fulfilled (copy window $w = 0$), no copying takes place at all. On the other hand, if condition (1) is fulfilled, copying will occur and the

with neighboring bits (marks) and will lead to additional 'interference peaks'. The size of the copy window w depends on the exact shape of the temperature profile (dependent, for example, on the laser power and on the ambient temperature), the strength of the external applied magnetic field, and on material parameters that may show range variations.

5 On the one hand, the laser power used in the readout process should be high enough to enable copying. On the other hand, a higher laser power increases the overlap of the temperature induced coercivity profile and the stray field profile of the bit pattern. The coercivity H_c decreases and the stray field increases with increasing temperature. When the overlap becomes too large, correct readout of a space is no longer possible due to false
10 signals generated by neighboring marks. The difference between this maximum allowed laser power and the minimally required laser power determines the, so called, power margin. This power margin decreases with decreasing bit length. Experiments have shown that when applying current methods, bit lengths of $0.10 \mu\text{m}$ can be correctly detected at a small power margin of less than 1%. Therefore, for higher densities, the power margin remains quite small
15 so that optical power control during readout is very important.

Conventionally, that is in phase change recording or conventional magneto-optic recording, the laser power during read mode is controlled by a feedback loop that measures the laser output power using for example a, so called, Forward Sense Diode (FSD). During writing, an additional running optimum power control method might be applied to
20 provide an absorption control, which method, for example, uses the reflected light during the writing process.

However, the accuracy of these loops is by far not sufficient for robust readout of MAMMOS disks. For example, a change in the ambient temperature is generally not measured by the FSD, but it influences the copy window.

25 Another idea is to control the laser power by counting the number of detected MAMMOS pulses from a known sequence or calculating the running digital sum of a detected signal from a recorded DC free modulation code. In these cases, an insufficient laser power will result in a smaller number of pulses than expected since no copying occurs in some cases. On the other hand, an excessive laser power will give more pulses than expected.
30 An disadvantage of this kind of pulse counting control methods is the fact that errors must be made deliberately to obtain an error signal.

It is an object of the present invention to provide a reading method and a reading apparatus for domain expansion readout by means of which a robust and reliable readout process can be achieved.

5 This object is achieved according to the present invention by providing a method as claimed in claim 1 and by providing an apparatus as claimed in claim 8.

Accordingly, a dynamic copy window control function is provided by using induced clock deviations as an input for a copy window control function. Thereby, the accuracy of the copy window size is increased to improve robustness and reliability of the
10 readout process.

The clock signal may be recovered from the readout pulse, from a wobbled groove, or from fine embossed clock marks provided in the disk, or from any combination thereof.

The predetermined parameter may correspond to the value of the radiation
15 power. Alternatively, the predetermined parameter may correspond to the strength of the external magnetic field. In a further embodiment, the predetermined parameter may correspond to a combination of the radiation power value and the magnetic field strength. Now, a coarse control may be performed based on the radiation power value while a fine control may then be based on the external magnetic field strength. This option is preferred in
20 terms of stability and power consumption. Nevertheless, the reverse option is also possible. The magnetic field strength may, for example, be varied by varying a coil current of a magnet head of the readout system. Of course, as mentioned above, both parameters may be used in combination, that is to implement a combined coarse and fine control function.

Furthermore, the control information may be obtained from a deviation of a
25 maximum value of a phase error of a recovered clock signal from a predetermined set value. The predetermined additional change pattern may be a periodic pattern of a predetermined frequency. In particular, the periodic pattern may be a sinusoidal pattern so as to provide an easy lock-in detection. Alternatively, the periodic pattern may be a square wave pattern, preferably at half of the bit frequency or an integer multiple of half of the bit frequency,
30 which has the advantage that it is easy to implement in the laser or coil driver circuitry.

The external magnetic field may be maintained by a field control means until the mark region is copied and may then be reversed in response to a detection of the readout pulse.

Other objects, features and advantages are defined in the independent claims.

In the following, the present invention will be described on the basis of a preferred embodiment and with reference to the accompanying drawings, in which:

5 Fig. 1 shows a schematic diagram of a magneto-optical disk player according to a preferred embodiment;

Fig. 2 shows a typical stack of a recording layer and of a readout layer in a magnetic super resolution (MSR) medium;

Fig. 3 shows typical crescent shaped domain regions formed in the storage layer; and

10 Fig. 4 shows a diagram indicating a characteristic of the magnetization of the recording layer as a function of the temperature;

Fig. 5 shows a diagram indicating a characteristic of the coercivity of the readout layer as a function of the temperature;

15 Fig. 6 shows a schematic representation of the sensitivity of the copy window size as a function of the coercivity, the external magnetic field, and the laser power;

Fig. 7 shows a diagram indicating a characteristic of the copy window size as a function of the temperature;

Fig. 8 shows readout signals for constant reading parameters and a small copy window size equal to $b/2$;

20 Fig. 9 shows readout signals for an increased copy window size;

Fig. 10 shows a schematic block diagram of a clock recovery circuit according to a preferred embodiment; and

Fig. 11 shows a diagram indicating a characteristic of the copy window size and a phase error amplitude as a function of the threshold temperature.

25

A preferred embodiment will now be described on the basis of a MAMMOS disk player as indicated in Fig. 1.

30 Fig. 1 schematically shows the construction of the disk player according to a preferred embodiment. The disk player comprises an optical pick-up unit 30 having a laser light radiating section for irradiation of a magneto-optical recording medium or record carrier 10, such as a magneto-optical disk, with light that has been converted, during recording, to pulses with a period synchronized with code data and a magnetic field applying section comprising a magnetic head 12 which applies a magnetic field in a controlled manner at the time of recording and playback on the magneto-optical disk 10. In the optical pick-up unit 30 a laser is

connected to a laser driving circuit which receives recording and readout pulses from a recording/readout pulse adjusting unit 32 to thereby control the pulse amplitude and timing of the laser of the optical pick-up unit 30 during a recording and readout operation. The recording/readout pulse adjusting circuit 32 receives a clock signal from a clock generator 26 which may comprise a PLL (Phase Locked Loop) circuit.

It is noted that for reasons of simplicity, the magnetic head 12 and the optical pickup unit 30 are shown on opposite sides of the disk 10 in Fig. 1. However, according to the preferred embodiment they should be arranged on the same side of the disk 10.

The magnetic head 12 is connected to a head driver unit 14 and receives, at the time of recording, code-converted data via a phase adjusting circuit 18 from a modulator 24. The modulator 24 converts input recording data to a prescribed code.

At the time of playback, the head driver 14 receives a timing signal via a playback adjusting circuit 20 from a timing circuit 34, wherein the playback adjusting circuit 20 generates a synchronization signal for adjusting the timing and amplitude of pulses applied to the magnetic head 12. The timing circuit 34 derives its timing signal from the data readout operation, as described later. Thus, a data dependent field switching can be achieved. A recording/playback switch 16 is provided for switching or selecting the respective signal to be supplied to the head driver 14 at the time of recording and at the time of playback.

Furthermore, the optical pick-up unit 30 comprises a detector for detecting laser light reflected from the disk 10 and for generating a corresponding reading signal applied to a decoder 28 which is arranged to decode the reading signal to generate output data.

Furthermore, the reading signal generated by the optical pick-up unit 30 is supplied to a clock generator 26 in which a clock signal obtained from embossed clock marks of the disk 10 is extracted or recovered, and which supplies the clock signal for synchronization purposes to the recording pulse adjusting circuit 32 and the modulator 24. In particular, a data channel clock may be generated in the PLL circuit of the clock generator 26. It is noted that the clock signal obtained from the clock generator 26 may as well be supplied to the playback adjusting circuit 20 to thereby provide a reference or fallback synchronization which may support the data dependent switching or synchronization controlled by the timing circuit 34.

In case of data recording, the laser of the optical pick-up unit 30 is modulated with a fixed frequency corresponding to the period of the data channel clock, and the data recording area or spot of the rotating disk 10 is locally heated at equal distances. Additionally, the data channel clock output by the clock generator 26 controls the modulator 24 to generate a data signal with the channel clock period. The recording data are modulated and code-

converted by the modulator 24 to obtain a binary run length information corresponding to the information of the recording data.

The structure of the magneto-optical recording medium 10 may correspond to the structure described in the JP-A-2000-260079.

5 In the preferred embodiment shown in Fig. 1, the timing circuit 34 is provided for supplying a data dependent timing signal to the playback adjusting circuit 20. As an alternative, the data dependent switching of the external magnetic field may as well be achieved by supplying the timing signal to the head driver 14, so as to adjust the timing or phase of the external magnetic field. The timing information is obtained from the (user) data
10 on the disk 10. To achieve this, the playback adjusting circuit 20 or the head driver 14 are adapted to provide an external magnetic field which is normally in the expansion direction. When a rising signal edge of a MAMMOS peak is observed by the timing circuit 34 at an input line connected to the output of the optical pickup unit 30, the timing signal is supplied to the playback adjusting circuit 20 such that the head driver 14 is controlled to reverse the
15 magnetic field after a short time to collapse the expanded domain in the readout layer, and shortly after that reset the magnetic field to the expansion direction. The total time between the peak detection and the field reset is set by the timing circuit 34 to correspond to the sum of the maximum allowed copy window and one channel bit length on the disk 10 (times the linear disk velocity).

20 In the following, a dynamic copy window control function according to a preferred embodiment is described. Fig. 6 shows a schematic representation of the sensitivity of the copy window size as a function of the coercivity, the external magnetic field, and the laser power. From experiments it appeared that for robust read-out of the domains the laser power must be controlled with an accuracy better than 0.8%. As indicated in Fig. 6 the
25 threshold temperature for the copying process is determined at the point where the sum of the stray field H_s and of the external field H_{ext} equals the coercivity H_c . In the lower part of the diagram a temperature profile TP and an intensity profile IP of the optical spot are shown in the tangential direction of the disk track. Due to the movement of the disk, the temperature profile TP has an asymmetrical shape and the intensity profile IP slightly advances the
30 temperature profile in the disk movement direction. The size of the copy window w is then determined by the width of the temperature profile TP at the threshold temperature $T_{threshold}$, as indicated by the grey rectangular area in the lower left part of Fig. 6.

As a first order model, the top of the temperature profile TP can be regarded as a parabola (note that only the top of the temperature profile is used to achieve the required high resolution read-out). This can be expressed as follows:

$$T(x) = ax^2 + bx + c$$

- 5 The width of the copy window is now a square root function depending on the threshold temperature $T_{\text{threshold}}$, as expressed by the following equation:

$$w_x = \frac{\sqrt{b^2 - 4ac + 4aT_{\text{threshold}}}}{a}$$

The onset temperature for the copy window to occur is now:

10

$$T_{\text{threshold}} = c - \frac{b^2}{4a}$$

- The above function $w_x(T)$ is schematically drawn in Fig. 7. The hatched region is the proper working range for MAMMOS readout where no interference peaks will occur, if the system is properly synchronized. As can be gathered from Fig. 7, the size w of the copy window increases according to a square root function, while the amount of change of the copy window size w , i.e. the tangential slope or derivative of the graph, depends on the actual threshold temperature. This fact can be used to provide a copy window control functionality as follows.

20

- The solution proposed here is to measure the size w of the copy window continuously by using information from the detected data signal in the read mode. Fig. 8 shows some key signals for readout of MAMMOS disks in a steady-state situation with constant laser power, constant ambient temperature, homogeneous disk properties, constant field strength, constant coil-disk distance, etc. The top graph shows the magnetic bits in the storage layer. The second graph shows the overlap signal (convolution) of the magnetic bit pattern and the copy window. The third graph shows the external magnetic field, and the bottom graph shows the obtained MAMMOS signal. When the overlap signal is non-zero copying of domains will take place. As already mentioned, the external magnetic field is kept high until a bit or domain is copied from the storage layer and expanded in the readout layer.
- 25
- 30 Then, after a fixed delay, the external field is reversed and the domain is collapsed until the next bit transition or domain copying occurs.

Fig. 9 shows a diagram similar to Fig. 8, but now one of the parameters to be controlled, e.g. the laser power, is increased deliberately. This increase/decrease (wobbling) is done with a predefined change pattern, e.g. a periodic pattern with a small amplitude. The wobbling causes the copy window to increase or decrease in size synchronously to the wobble frequency. Comparing Figs. 8 and 9, it becomes clear that when the copy window increases in size the next transition will appear somewhat earlier than expected. On the other hand, when the copy window decreases in size the next transition will be delayed slightly. This is the phase error $\Delta\phi$ shown in Fig. 9. However, as can be gathered from Fig. 7, the increase or decrease of the copy window size and hence the value of the phase error $\Delta\phi$ depends on the actual threshold temperature.

When the wobble frequency lies above the bandwidth of the clock recovery PLL circuit of the clock generator 26, the phase error of this PLL circuit can be used to detect the small deviation or phase error $\Delta\phi$ from the expected transition position. The frequency deviation of the introduced wobble or change pattern should have a zero average value.

Fig. 10 shows an example of the PLL circuit of the clock generator 26 according to the preferred embodiment. The detected run length signal output from the pickup unit 30 is supplied to a phase detector 261 in which the phase of the run length signal is compared to the phase of a feedback signal obtained from a clock divider 265 to which the output signal of a voltage controlled oscillator (VCO) 264 is applied. The output of the phase detector 261 which corresponds to the phase difference between the run length signal and the feedback signal is supplied to a loop filter 263 for extracting the desired frequency to be phase-controlled in the PLL circuit. A band pass filter 262 with center frequency around the wobble frequency can be used for low noise detection of the phase error $\Delta\phi$, i.e. lock-in detection. The phase error $\Delta\phi$ obtained here cannot be used yet as an absolute error signal for laser power control as only the absolute scale is known, but no reference (zero or offset) is present. I.e., only changes in the size of the copy window can be measured.

To circumvent this problem, the derivative of the copy window size w as function of temperature can be measured to obtain a control information for controlling the size of the copy window.

Fig. 11 shows the derivative of the copy window characteristic of Fig. 7. Due to the fact that the derivative or amount of change of the copy window size directly leads to the phase error $\Delta\phi$, the amplitude of the detected phase error $\Delta\phi$ corresponds to the derivative and can thus be used for copy window control. As a reference condition, this amplitude of the

phase error $\Delta\phi$ must fulfil an initially determined set condition or set point sp. The deviation from this set point sp then can be used as a control signal PE for the laser power control procedure or for controlling any other suitable reading parameter, e.g. strength of the external magnetic field.

5 Any changes in size w of the copy window due to changes in parameters, such as coil-disc distance, ambient temperature, etc., are counteracted by the controlled parameter, e.g. laser power in the present example.

10 However, when the laser power is controlled, the system might suffer from a slight thermal memory that causes a phase shift of the applied wobble signal. In principle, this shift can be compensated for by introducing a delay in the control loop, which should be a function of the disk velocity and also depends on the disk stack (thermal design). As an alternative, field strength of the external magnetic field might be used as a control parameter, e.g. by varying the coil current. It is noted that this control is equivalent given by the relation as depicted in Fig. 6, as the threshold temperature is also shifted in response to the strength of
15 the external magnetic field H_{ext} . The described idea will not change significantly in that case.

It is noted that the present invention can be applied to any reading system for domain expansion magneto-optical disk storage systems. Any suitable reading parameter can be varied to control the copy window size. Furthermore, any suitable change pattern can be applied to the selected reading parameter so as to induce the phase error of the readout signal.
20 The preferred embodiment may thus vary within the scope of the attached claims.

CLAIMS:

1. A reading method for reading a magneto-optical recording medium comprising a storage layer and a readout layer, wherein an expanded domain leading to a readout pulse is generated in said readout layer by copying a mark region from said storage layer to said readout layer upon heating by a radiation power and with the help of an external magnetic field, said method comprising the steps of:
 - a) controlling the size of a spatial copy window of said copying process by varying a predetermined reading parameter in response to a control information derived from said readout pulse,
 - b) applying a predetermined additional pattern of change to said predetermined parameter, and
 - c) obtaining said control information from a deviation of a clock signal.
2. A method according to claim 1, wherein said clock signal is recovered from said readout pulse, from a wobbled groove, or from embossed marks provided on said recording medium or from any combination of these.
3. A method according to claim 1 or 2, wherein said predetermined parameter corresponds to the value of said radiation power.
4. A method according to claim 1 or 2, wherein said predetermined parameter corresponds to the strength of said external magnetic field.
5. A method according to claim 1 or 2, wherein said predetermined parameter corresponds to a combination of the value of said radiation power and the strength of said external magnetic field.
6. A method according to claim 5, wherein one of said value of said radiation power and said strength of said external magnetic field is used for coarse control and the other one is used for fine control.

7. A method according to any one of claims 4 to 6, wherein said strength of said external magnetic field is varied by varying a coil current of a magnet head.

5 8. A method according to any one of the preceding claims, wherein said control information is obtained from a deviation of a maximum value of a phase error of said recovered clock signal from a predetermined set value.

9. A method according to any one of the preceding claims, wherein said
10 predetermined additional change pattern is a periodic pattern of a predetermined frequency.

10. A method according to claim 9, wherein said periodic pattern is a sinusoidal pattern.

11. A method according to claim 9, wherein said periodic pattern is a square wave
15 pattern.

12. A method according to claim 11, wherein the frequency of said square wave
pattern corresponds to half of a bit frequency or an integer multiple of half of the bit
20 frequency.

13. A method according to any one of the preceding claims, wherein said clock signal is recovered by using a phase locked loop function.

25 14. A reading apparatus for reading from a magneto-optical recording medium comprising a storage layer and a readout layer, wherein an expanded domain leading to a readout pulse is generated in said readout layer by copying a mark region from said storage layer to said readout layer upon heating by a radiation power and the help of an external magnetic field, said apparatus comprising:

30 a) control means for controlling the size of a spatial copy window of said copying process by varying a predetermined reading parameter in response to a control information derived from said readout pulse,

b) change means for applying a predetermined additional pattern of change to said

~~predetermined reading parameter~~

c) clock recovery means for obtaining said information from a deviation of a clock signal.

15. A reading apparatus according to claim 14, wherein said clock recovery means is arranged to recover said clock signal from said readout pulse, from a wobbled groove, or
5 from embossed marks provided on said recording medium or from any combination of these.

16. A reading apparatus according to claim 14 or 15, wherein said control means is arranged to vary said radiation power.

10 17. A reading apparatus according to claim 14 or 15, wherein said control means is arranged to vary said external magnetic field.

18. A reading apparatus according to claim 14 or 15, wherein said control means is arranged to vary the value of said radiation power and the strength of said external
15 magnetic field in combination.

19. A reading apparatus according to claim 18, wherein said control means is arranged to use one of said value of said radiation power and said strength of said external magnetic field for coarse control and the other one for fine control.

20 20. A reading apparatus according to any one of claims 14 to 19, further comprising field control means for maintaining said external magnetic field until said mark region is copied and for reversing said external magnetic field in response to a detection of said readout pulse.

25 21. A reading apparatus according to any one of claims 14 to 20, wherein said clock recovery means is arranged to obtain said control information from a deviation of a maximum value of a phase error of said clock signal from a predetermined set value.

30 22. A reading apparatus according to any one of claims 14 to 21, wherein said clock recovery means comprises a phase locked loop circuit.

23. A reading apparatus according to any one of claims 14 to 22, wherein said change means is arranged to use a periodic pattern of a predetermined frequency as said predetermined additional change pattern.

5 24. A reading apparatus according to claim 23, wherein said periodic pattern is a sinusoidal pattern.

25. A reading apparatus according to claim 23, wherein said periodic pattern is a square wave pattern.

10

26. A reading apparatus according to claim 25, wherein the frequency of said square wave pattern corresponds to half of a bit frequency or an integer multiple of half of the bit frequency.

15 27. A reading apparatus according to any one of claims 14 to 26, wherein said reading apparatus is a disk player for MAMMOS disks.

ABSTRACT:

The present invention relates to a method and apparatus for reading a magneto-optical domain expansion recording medium (10), wherein the size of a spatial copy window of a domain copying process is controlled by varying a predetermined reading parameter in response to a control information derived from a readout pulse. A predetermined
5 additional pattern of change is applied to said predetermined parameter and the control information is then derived from a deviation of a clock signal. Thereby, the size of the copy window can be controlled dynamically to obtain a robust and reliable readout process.

Fig. 1

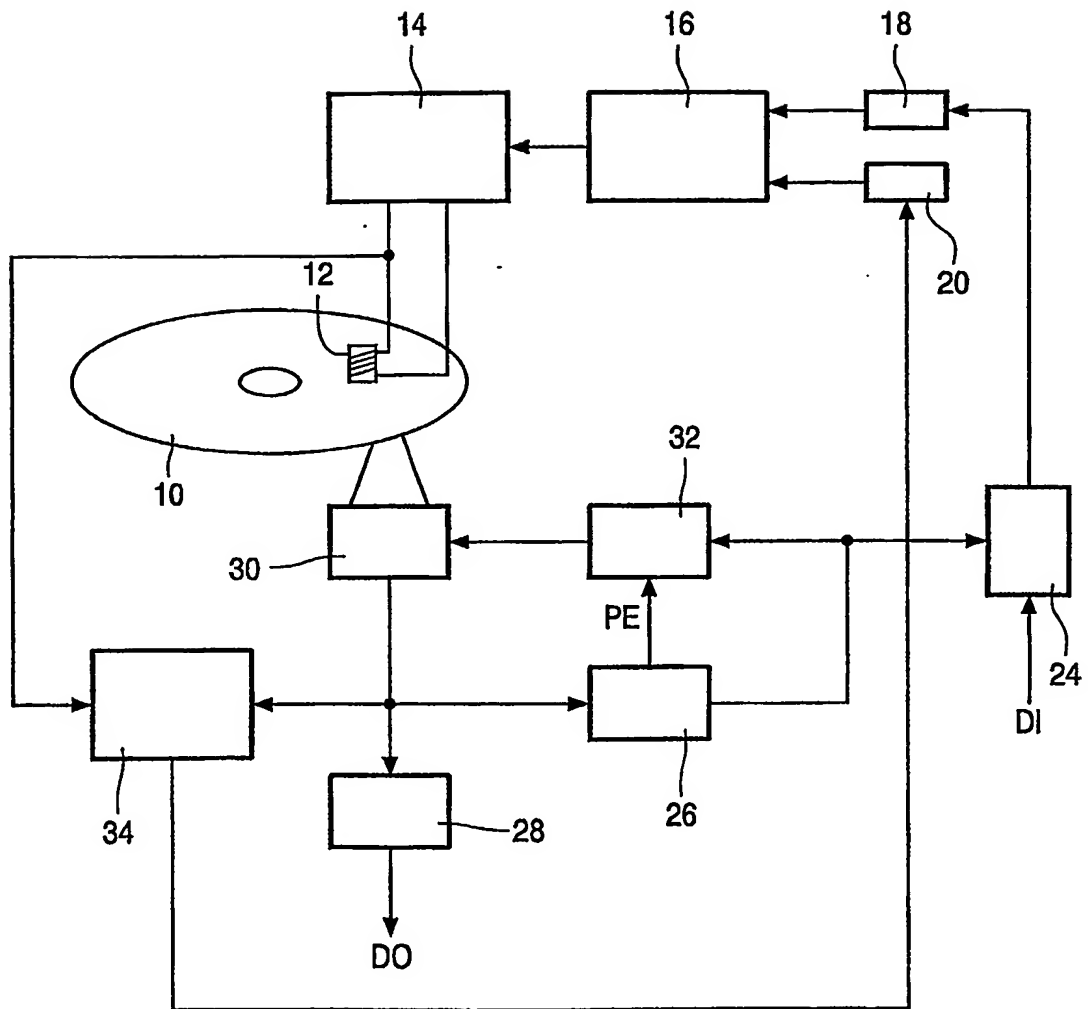


FIG. 1

2/8

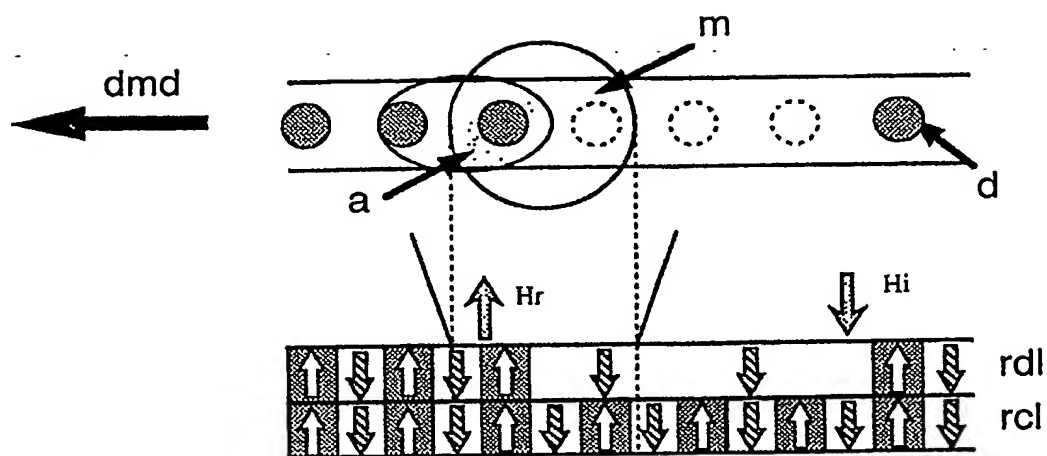


FIG.2

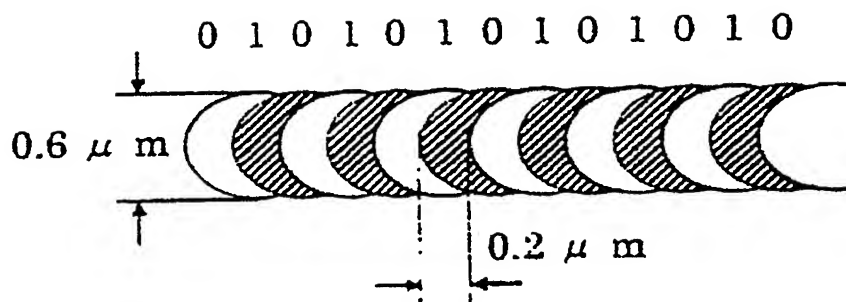


FIG.3

3/8

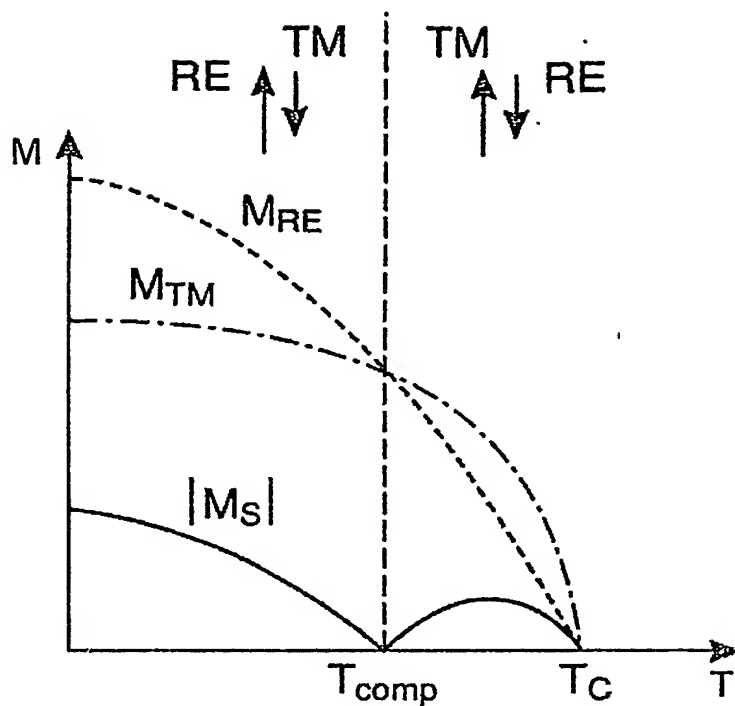


FIG.4

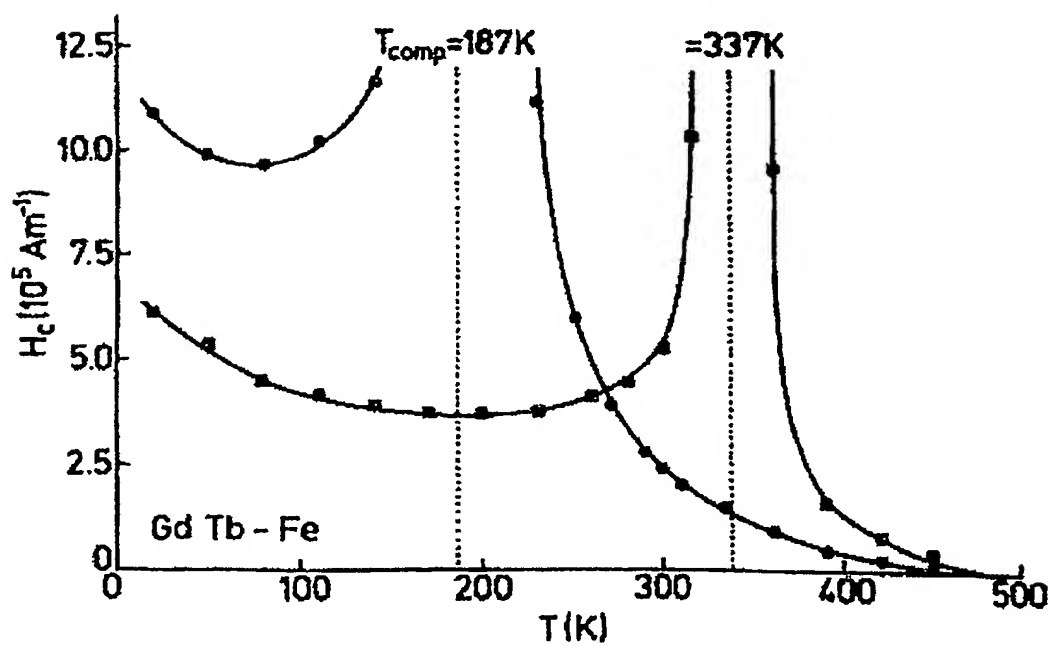


FIG.5

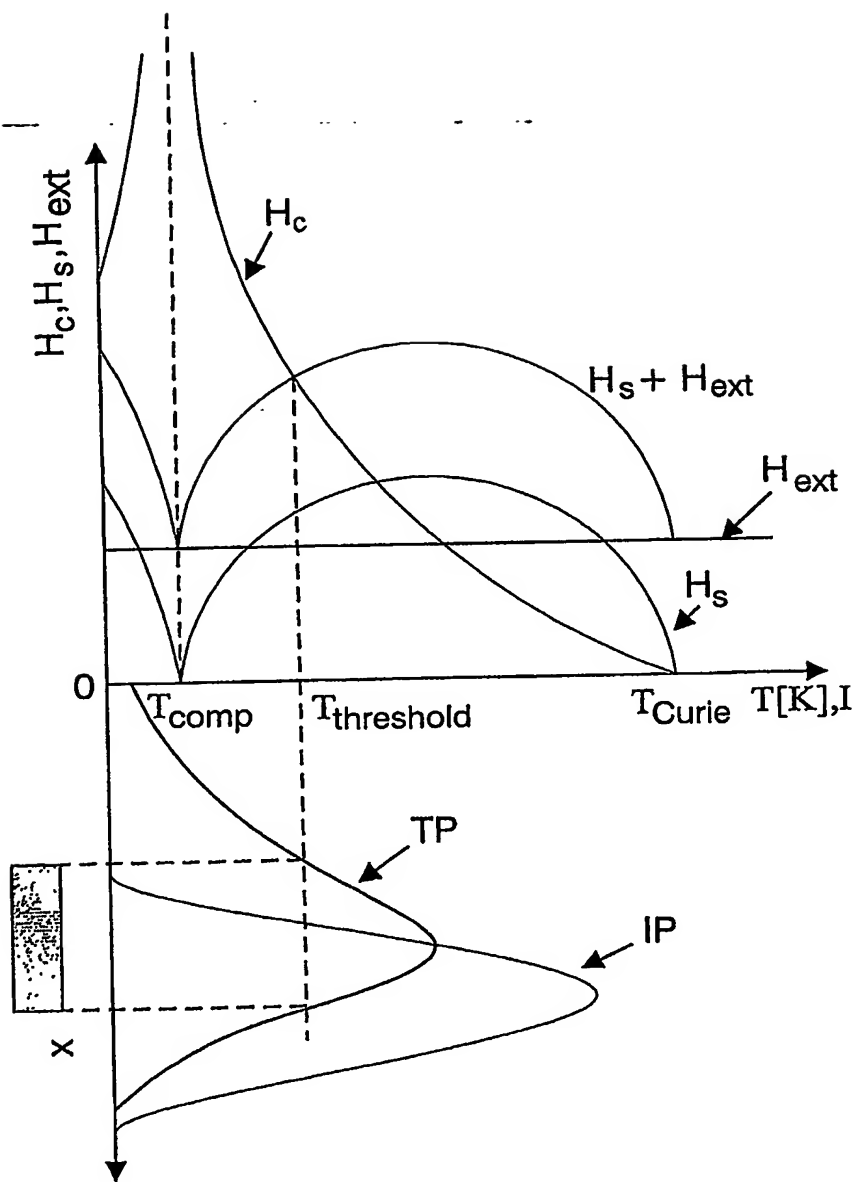


FIG.6

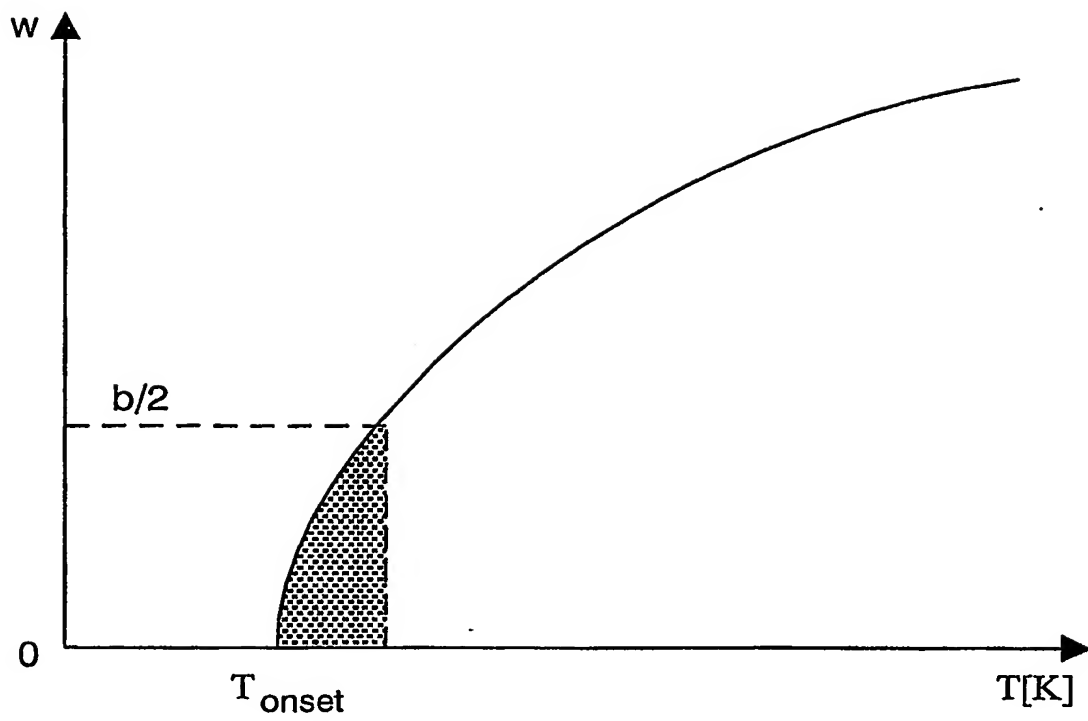


FIG.7

6/8

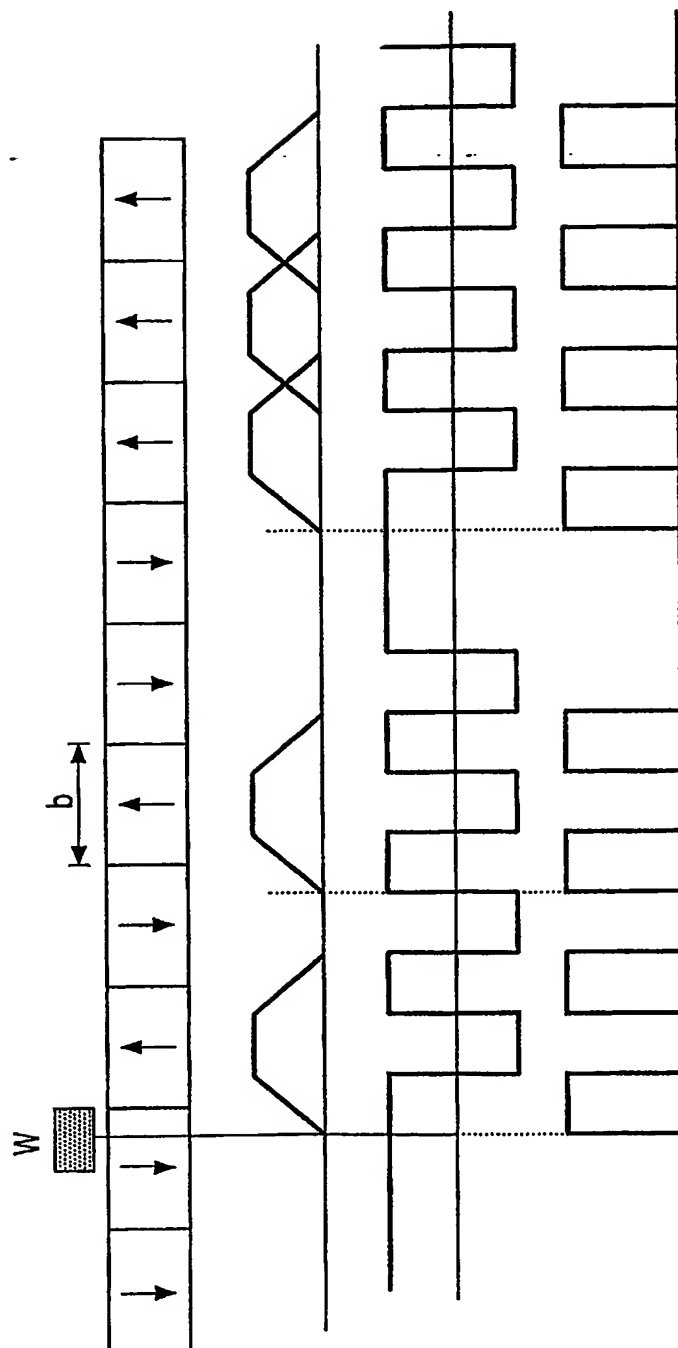


FIG. 8

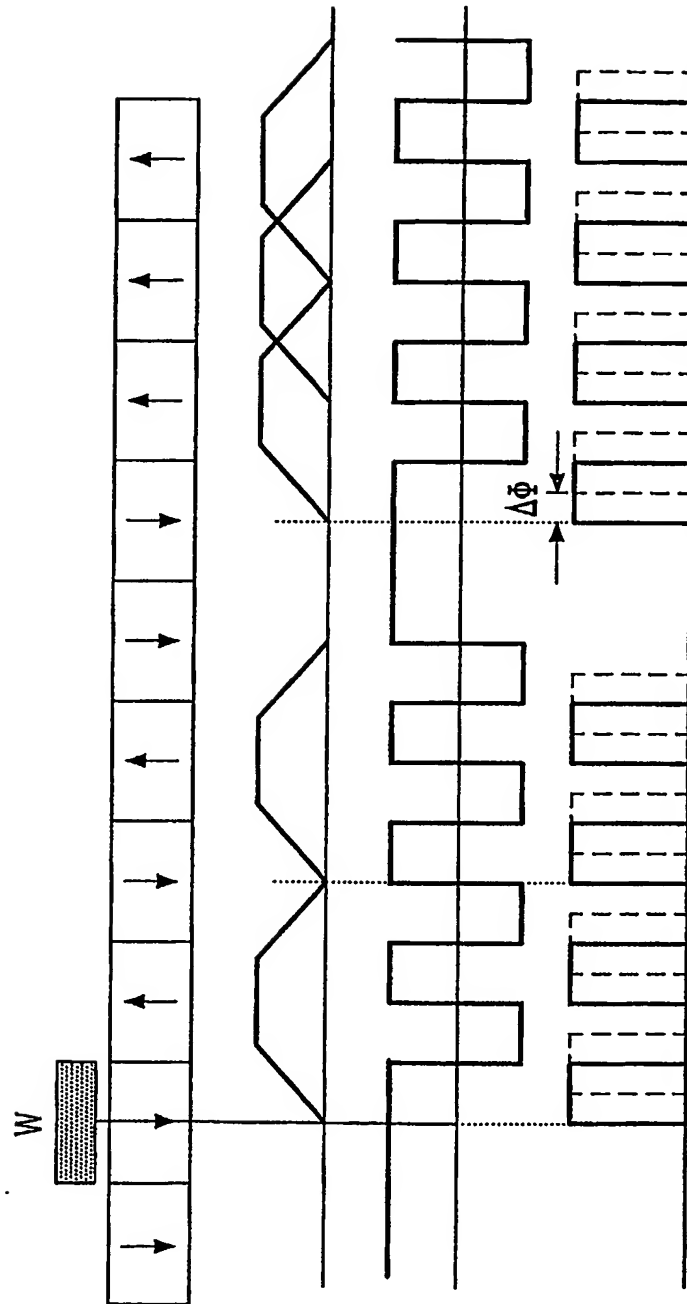


FIG. 9

8/8

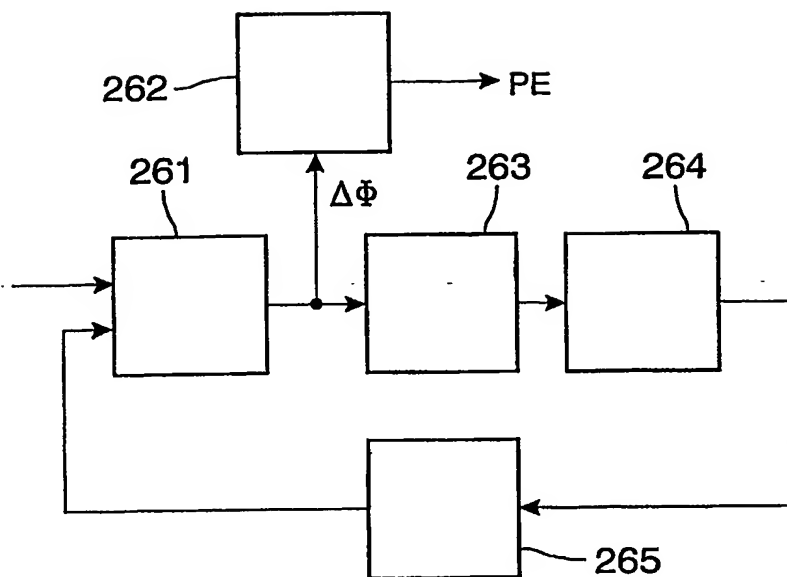


FIG. 10

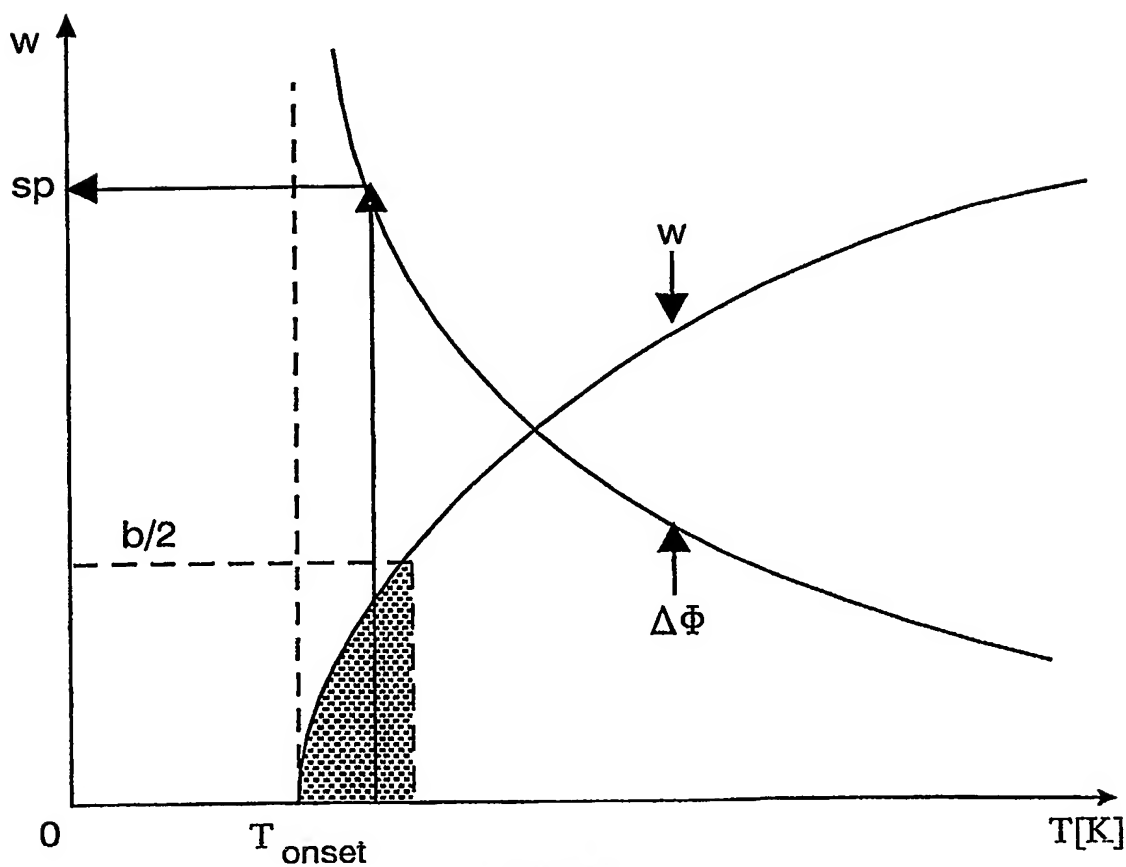


FIG. 11

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☒ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☒ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.